

Fiber Optic Cable Outdoor Armored Multi Loose Tube (MLT)

Description


DME PROLINK's Outdoor armored Multi Loose Tube Fiber cable is designed specifically for duct and aerial applications requiring low to higher core-counts. Available as Single-mode. These corrugated steel tape armored cables are suitable for installation in aerial or duct environment for long haul communication, LAN, especially suitable for the situation of high requirements to lateral pressure resistance.



The loose tube stranding technology make the fibers have good secondary excess length and allow the fibers free movement in the tube, which keeps the fiber stress-free while the cable is subjected to longitudinal stress.

Corrugated steel tape armored and PE outer sheath providing property crush resistance and gun shot resistance features.

Metal strength member provides excellent strain performance.

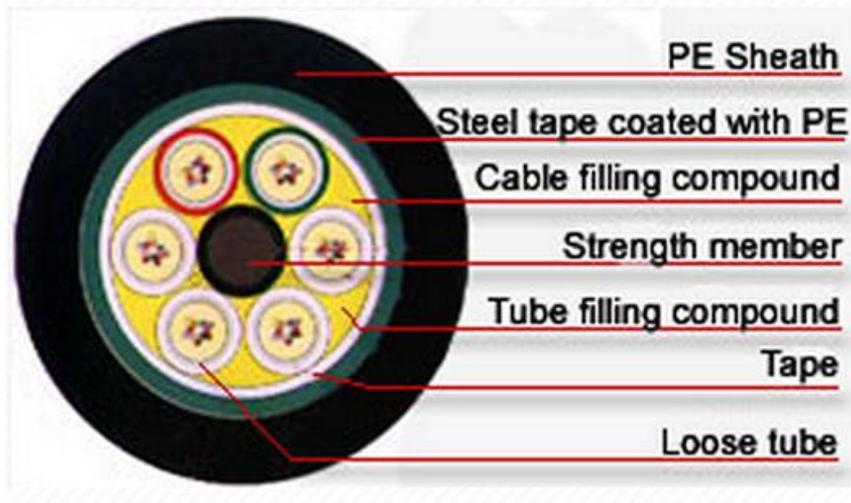

D113x-nmjpsc

TECHNICAL DATA



Technical Assistance
Middle East - +971 (4) 8118000
www.ecsglobalwire.com



Fiber Optic Cable

Outdoor Armored Multi Loose Tube (MLT)

D	1	1	3	x	-	n	m	j	p	s	c
x				Pin assigned by ECS							
0-9				Inventory Management Index							
n				Number of Fibers							
06 - 144				6 - 144 Fibers							
m				Mode							
6				OS1							
7				OS2							
j				Sheath Construction							
PV				PVC							
LS				LSZH							
PE				Polyethylene							
p				Physical Construction							
JF				Jelly-Filled							
ST				Steel-Tape Armored							
RP				Rodent-Proof							
FR				Fire-Retardant							
0				Not Applicable							

D113x-nmjpsc

TECHNICAL DATA



Technical Assistance
 Middle East - +971 (4) 8118000
www.ecsglobalwire.com



Fiber Optic Cable
Outdoor Armored Multi Loose Tube (MLT)

D113x-nmjpsc

TECHNICAL DATA

D	1	1	3	x	-	n	m	j	p	s	c
s						Specification					
2D						G.652D					
7A1						G.657A1					
7A2						G.657A2					
7B2						G.657B2					
7B3						G.657B3					
c						Sheath Color					
BK						Black					



Technical Assistance
Middle East - +971 (4) 8118000
www.ecsglobalwire.com



Fiber Optic Cable Outdoor Armored Multi Loose Tube (MLT)

D113x-nmjpsc

TECHNICAL DATA

Web Site: www.ecsglobalwire.com

Corporate Head Office: 3135 - 6900 Graybar Road, Richmond, BC V6W 0A5, Canada • Phone: +1(604)276-9913 Fax: +1(604)276-9915. For a listing of all ECS Global Wire & Cable's Sales Office locations, please refer to our web site.

Middle East Office: Jebel Ali Free Zone (South), Dubai, United Arab Emirates • Phone: +971 (4) 811 8000 Fax: +971 (4) 8809360. Enquires to datacomm@ecsglobalwire.com.

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ECS Global Wire & Cable reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting ECS Global Wire & Cable's Regional Head Office in the UAE.

June 2011 Original © 2011 ECS Global Wire & Cable. All Rights Reserved

