


Fiber Optic Cable

Central Loose Tube (CLT) Armored Outdoor

Description

DME PROLINK's Central Loose Tube Armored outdoor cable is designed specifically for outdoor access elements of a network architecture.

A steel wire parallel strength member give this cable extremely good mechanical and environmental performance and the relatively light weight makes this cable easy to deploy.

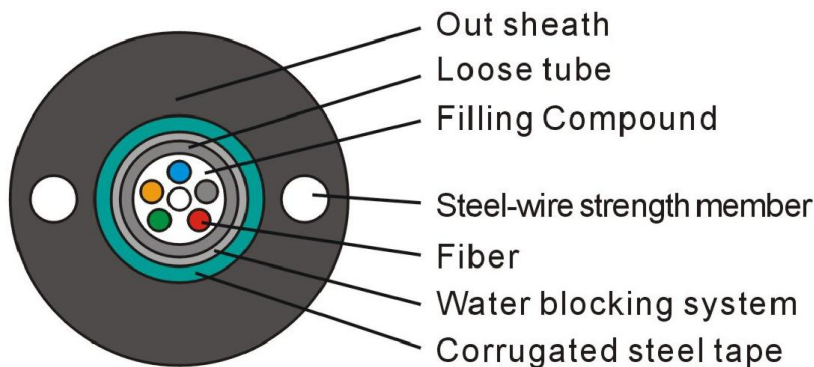

Technical Parameters:

| Cable Count | Out sheath Diameter (MM) | Weight (KG) | Minimum allowable Tensile Strength (N) | | Minimum allowable Crush Load (N/100mm) | | Minimum Bending Radius (MM) | |
|-------------|--------------------------|-------------|--|-----------|--|-----------|-----------------------------|-----------|
| | | | Short term | Long term | Short term | Long term | Short term | Long term |
| 2 | 8.3 | 78.0 | 1500 | 600 | 1000 | 300 | 20D | 10D |
| 4 | 8.3 | 78.0 | 1500 | 600 | 1000 | 300 | 20D | 10D |
| 6 | 8.3 | 78.0 | 1500 | 600 | 1000 | 300 | 20D | 10D |
| 8 | 8.3 | 78.0 | 1500 | 600 | 1000 | 300 | 20D | 10D |
| 10 | 8.3 | 78.0 | 1500 | 600 | 1000 | 300 | 20D | 10D |
| 12 | 8.3 | 78.0 | 1500 | 600 | 1000 | 300 | 20D | 10D |

D117x-nmjpsc

TECHNICAL DATA



Technical Assistance
Middle East - +971 (4) 8118000
www.ecsglobalwire.com



Fiber Optic Cable

Central Loose Tube (CLT) Armored Outdoor

| | | | | | | | | | | | |
|----------|----------|----------|----------|------------------------------|----------|----------|----------|----------|----------|----------|----------|
| D | 1 | 1 | 7 | x | - | n | m | j | p | s | c |
| x | | | | Pin assigned by ECS | | | | | | | |
| 0-9 | | | | Inventory Management Index | | | | | | | |
| n | | | | Number of Fibers | | | | | | | |
| 02 - 12 | | | | 02 - 12 Fibers | | | | | | | |
| m | | | | Mode | | | | | | | |
| 2 | | | | OM3 | | | | | | | |
| 3 | | | | OM4 | | | | | | | |
| 6 | | | | OS1 | | | | | | | |
| 7 | | | | OS2 | | | | | | | |
| j | | | | Sheath Construction | | | | | | | |
| PE | | | | Poly Ethylene | | | | | | | |
| LS | | | | LSZH | | | | | | | |
| p | | | | Physical Construction | | | | | | | |
| JF | | | | Jelly-Filled | | | | | | | |
| ST | | | | Steel-Tape Armored | | | | | | | |
| RP | | | | Rodent-Proof | | | | | | | |
| 0 | | | | Not Applicable | | | | | | | |

D117x-nmjpsc

TECHNICAL DATA



Technical Assistance
 Middle East - +971 (4) 8118000
www.ecsglobalwire.com



Fiber Optic Cable

Central Loose Tube (CLT) Armored Outdoor

| D | 1 | 1 | 7 | x | - | n | m | j | p | s | c |
|----------|---|---|---|---|---|----------------------|---|---|---|---|---|
| s | | | | | | Specification | | | | | |
| | | | | | | No Spec | | | | | |
| 2D | | | | | | G.652D | | | | | |
| 7A1 | | | | | | G.657A1 | | | | | |
| 7A2 | | | | | | G.657A2 | | | | | |
| 7B2 | | | | | | G.657B2 | | | | | |
| 7B3 | | | | | | G.657B3 | | | | | |
| c | | | | | | Sheath Color | | | | | |
| BK | | | | | | Black | | | | | |

D117x-nmjpsc

TECHNICAL DATA



Technical Assistance
 Middle East - +971 (4) 8118000
www.ecsglobalwire.com



Fiber Optic Cable Central Loose Tube (CLT) Armored Outdoor

D117x-nmjpsc

TECHNICAL DATA

Web Site: www.ecsglobalwire.com

Corporate Head Office: 3135 - 6900 Graybar Road, Richmond, BC V6W 0A5, Canada • Phone: +1(604)276-9913 Fax: +1(604)276-9915. For a listing of all ECS Global Wire & Cable's Sales Office locations, please refer to our web site.

Middle East Office: Jebel Ali Free Zone (South), Dubai, United Arab Emirates • Phone: +971 (4) 811 8000 Fax: +971 (4) 8809360. Enquires to datacomm@ecsglobalwire.com.

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ECS Global Wire & Cable reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting ECS Global Wire & Cable's Regional Head Office in the UAE.

June 2011 Original © 2011 ECS Global Wire & Cable. All Rights Reserved

