


## Fiber Optic Connector Field Installable

D165x-fam-c

TECHNICAL DATA

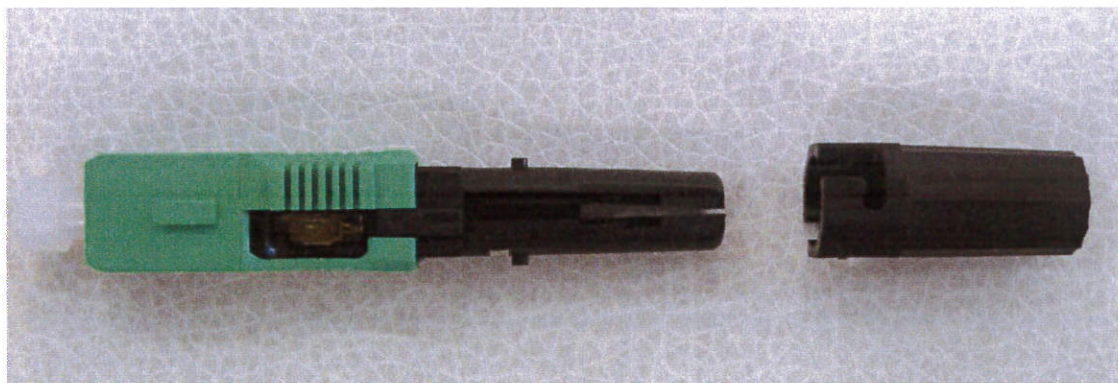

### Description

The field assembly connector is a cost-effective, pre-polished, field-installable connector, designed for ease of installation and re-use if so required. It requires no field polishing or epoxy, so no heat-curing devices nor special tooling are needed to facilitate the termination of the fiber.

### Features & Benefits

- ✓ Re-usable, i.e. supports multiple terminations.
- ✓ Ease of use, no specialized training required.
- ✓ Short termination time – no epoxy, no baking.
- ✓ Available in SC/APC
- ✓ Available for “flat” as well as conventional tight-buffered cable.
- ✓ Operating Temperature Range: -30°C to +75°C
- ✓ Storage Temperature Range: -40°C to +80°C

#### ETISALAT PRODUCT APPROVAL

EPA No: 780168-6  
The Item: FO Connector SC/APC  
Supplied by M/s. ECS

Is provisionally approved for use in buildings intended to connect to Etisalat FTTH Network. Etisalat do not undertake any responsibility towards any damage or hazard caused due to the use of this product.

Approved valid till 12-25-2017

Authorized signatory [Signature]

Designation SD/DRSH Date 18.2.16



Technical Assistance  
Middle East - +971 (4) 8118000  
www.ecsglobalwire.com

