


## Fiber Distribution Hub Wall Mount

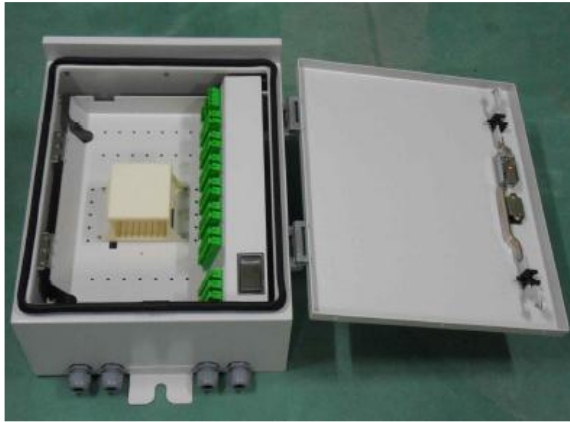

### Description

*DME PROLINK's* Wall Mount FDH is designed to terminate, splice and interconnect fiber optic cable in an indoor or outdoor environment. This enclosure accommodates FTTH applications by mounting to the exterior surface of a dwelling and connecting between the distribution cable and the feeder cable.

*DME PROLINK's* Wall Mount FDH can accommodate a variety of splitters from 1:16 to 2:32. It consist of a Single door with Lock. The cabinet is divided into two compartments, with the help of an inner door. One compartment holds the splice trays and the other compartment holds the splitters.

### Features & Benefits

- ✓ Wall Mount FDH are basically used for Buildings with less than 100 tenants.
- ✓ It has a capacity of 128 Termination
- ✓ Accommodates various Splitters as required for FTTx applications. It already comes with 1 No. of 2:32 Splitter with a provision to add more splitters if required.
- ✓ All cables are safely secured inside the cabinet and minimum bend-radii of 30mm is maintained.
- ✓ Designed for either pre-connectorised cable, field assembly connectors or field splicing of pigtails.
- ✓ Wall mountable
- ✓ Available with a variety of adaptors such as SC, FC, LC etc



**Technical Assistance**  
Middle East - +971 (4) 8118000  
[www.ecsglobalwire.com](http://www.ecsglobalwire.com)



### Specifications

Parameter		Value
General	Type	Wall Mount FDH
Dimension	W x H x D (mm)	375x515x230
Cable Entry	Inlet	2
	Outlet	2
Adapter Type	-	SC/APC
No. of Adapter	EA	128
No. of Splice Tray	EA	In: 1 / Out: 4
Tray Capacity	-	24 Splices
Splitter Module	2x32	1 No. is included
Splitter Module Slot	EA	Max. 8
Mounting Options	-	Pole / Wall

D1541-WFDHtnioc

TECHNICAL DATA



**Technical Assistance**  
 Middle East - +971 (4) 8118000  
[www.ecsglobalwire.com](http://www.ecsglobalwire.com)



D	1	5	4	1	-	WFDH	t	n	i	o	c
---	---	---	---	---	---	------	---	---	---	---	---

t	Type of Connector
LCA	LC/APC
SCA	SC/APC
n	No. of Splitters
1-8	1-8
i	Splitter Input
1	1
2	2
o	Splitter Output
2	2
16	16
32	32
c	Color
GY	Grey
WT	White

D1541-WFDHtnioc

TECHNICAL DATA



Technical Assistance  
 Middle East - +971 (4) 8118000  
[www.ecsglobalwire.com](http://www.ecsglobalwire.com)



D1541-WFDHtnioc

TECHNICAL DATA

**Web Site:** [www.ecsglobalwire.com](http://www.ecsglobalwire.com)

**Corporate Head Office:** 3135 - 6900 Graybar Road, Richmond, BC V6W 0A5, Canada • Phone: +1(604)276-9913 Fax: +1(604)276-9915. For a listing of all ECS Global Wire & Cable's Sales Office locations, please refer to our web site.

**Middle East Office:** Jebel Ali Free Zone (South), Dubai, United Arab Emirates • Phone: +971 (4) 811 8000 Fax: +971 (4) 8809360. Enquires to [datacomm@ecsglobalwire.com](mailto:datacomm@ecsglobalwire.com).

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ECS Global Wire & Cable reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting ECS Global Wire & Cable's Regional Head Office in the UAE.

**June 2011 Original © 2011 ECS Global Wire & Cable. All Rights Reserved**

