


Description

The FO Simplex Patch cord comes with SC/APC connector at both ends. The end faces of the connectors are still curved but are angled at an industry standard 8°. This maintains a tight connection, and it reduces back reflection to about -70 dB.

The Fiber used in DME PROLINK's Fiber Optic Patch cord, is made of pure silica and germanium doped silica. A UV curable acrylate material is applied over the Fiber Cladding as primary protective coating.

DME PROLINK quality personals ensures product reliability through rigorous qualification testing to assure cable performance and durability in adverse field environments. Excellent quality control is achieved through intense in-house quality check and stringent audit acceptance by ISO 9001.

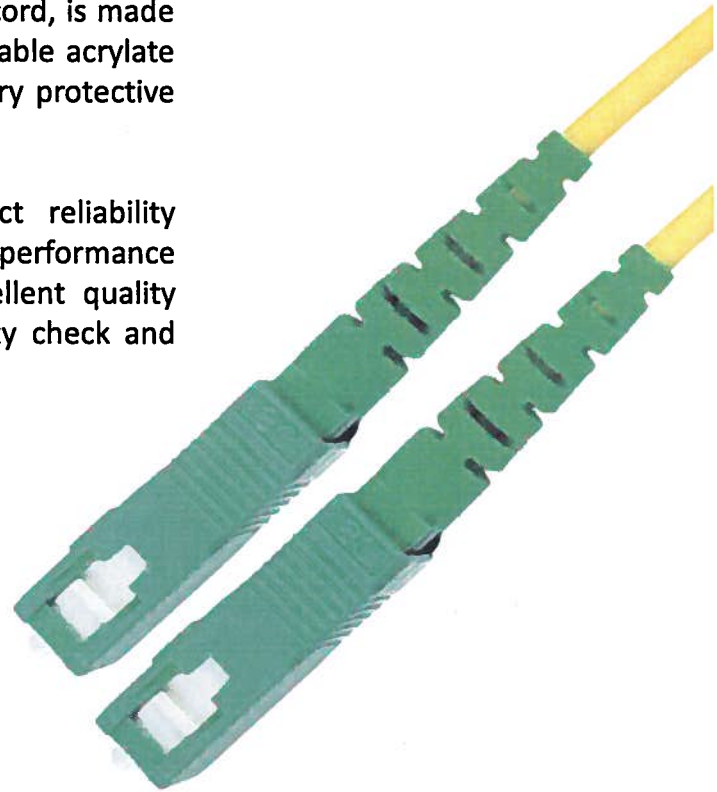

Features & Benefits

- APC type connector back reflection does not degrade with repeated mating.
- Outer Sheath is Low Smoke Zero Halogen
- G.652D
- 25 Years System Warranty
- Length of Patch cords: 1m, 1.5m, 2m, 3m, 5m, 10m, 15m, 20m, 30m
- FO patch cord comes in Cable Diameter with either 2.0mm or 3.0mm

ETISALAT PRODUCT APPROVAL

EPA No: 280168-5
The Item: FO Patch cord / pigtail sc/apc
Supplied by M/s. ECS
Is provisionally approved for use in buildings intended to connect to Etisalat FTTH Network. Etisalat do not undertake any responsibility towards any damage or hazard caused due to the use of this product.
Approved valid till 15 May 2018
Authorized signatory [Signature]
Designation F.S/D/DSHF Date 15/5/17